


## EMI cable shielding with metal carrier

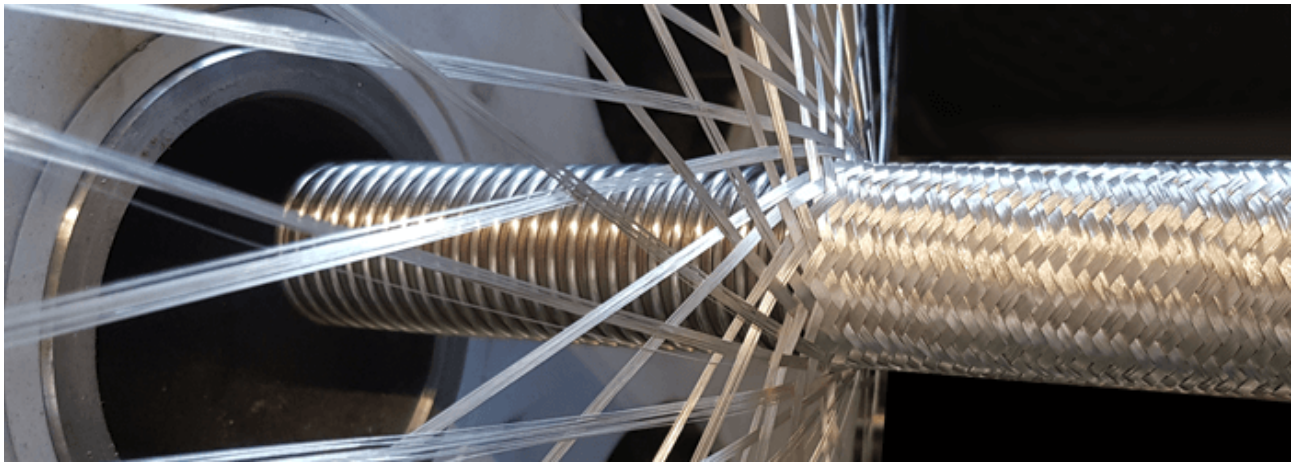

### EMI cable shielding with metal carrier AC4400

Stainless steel spiral hose used as steel carrier is a general-purpose high quality connecting hose. Made of AISI 304L stainless steel material.

Tin-plated copper wire mesh is provided by wrapping it in a steel carrier.

It is produced in 10 different diameters from 10,7 mm to 62,4 mm.



EMI cable shielding with metaal carrier Cu/Sm*						
Part number	Steel carrier inner diameter (mm)	Steel carrier outer diameter (mm)	Knitted outer diameter (mm)	Tolerance (mm)	Copper wire diameter (mm)	Minimum bending diameter static rmin (mm)
AC4411	6,2	9,6	10,7	±0,2	0,127	25
AC4414	8,2	12,2	13,7	±0,2	0,127	34
AC4416	10,2	14,2	15,6	±0,2	0,127	38
AC4418	12,2	16,3	17,8	±0,2	0,127	44
AC4423	16,2	21,6	22,8	±0,2	0,127	48
AC4429	20,2	26,9	28,5	±0,2	0,127	69
AC4434	25,3	32,1	33,8	±0,2	0,200	84
AC4444	32,2	41,1	43,1	±0,2	0,200	104
AC4453	40,1	49,7	52,1	±0,2	0,200	129
AC4463	50,2	60,2	62,4	±0,2	0,200	160

\* With tin-plated copper wire

## EMI cable shielding with metal carrier

---

Part number

Select an option:

AC4411 :

AC4414 :

AC4416 :

AC4418 :

AC4423 :

AC4429 :

AC4434 :

AC4444 :

AC4453 :

AC4463 :

\* Note: The **red** blocks are required