

Data Sheet

SCHEDA TECNICA/ TECHNICAL DATA SHEET

99.0267 METALIZED VELCRO – HOOK

➤ **Description:**

- Woven polyamide hook impregnated with silver
- For RMI / EMI applications and applications requiring electrical conductivity




➤ **Availability:**

- Widths: 5/8" (16mm), 1" (25mm) and 2" (50mm),
- Colors: brown silver
- Packaging: 50 yard rolls
 - 5/8" and 1": 500 yards per box
 - 2": 250 yards per box

➤ **Methods of attachment:**

- Sewing, stapling, gluing.

Performance characteristics: in combination with 99.0268 metalized velcro loop

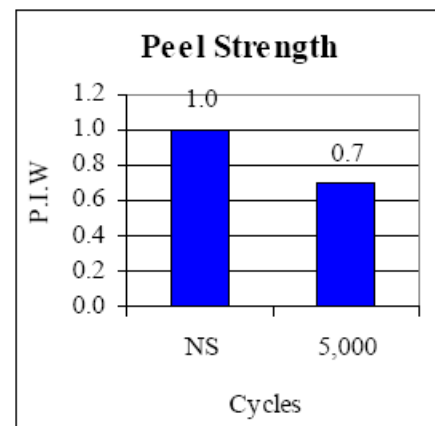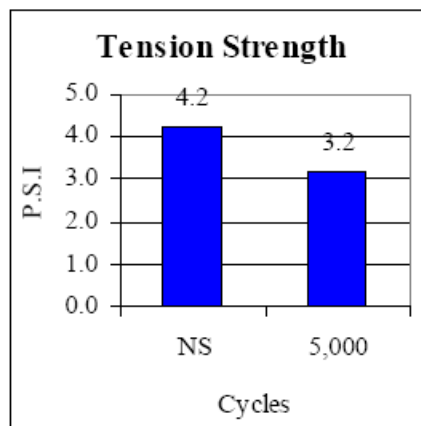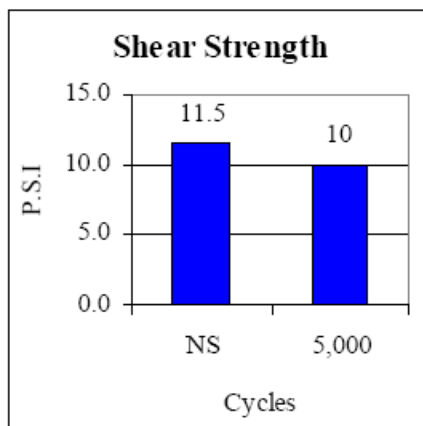

Tests performed at 73°F (±3°F) and 50% (±5%) relative humidity. Data average of multiple tests.

➤ **Physical Properties**

- Woven polyamide tape with 8 mil monofilament hook
- Weight: 315 g / sq. yd. (376 g / sq. m.)
- Height: 78 mils ± 2.0 (2.0 mm ± 0.5 mm)
- Width tolerance: ±1/16" (1.6 mm),
- Selvedge width: 3/32" (2.38 mm)
- Reactions to liquids:
 - Maximum shrinkage in boiling water: less than 2%.
 - Maximum humidity absorption: 6.25
- Effects of temperature:
 - Resistance heat up to: 280°F (138°C)
 - Resistance to electricity: less than 2 Ohms per square inch
 - **thickness when mated with 99.0268 loop: 1/8" (3.2mm)**

Produkt anfragen

Data Sheet

SCHEDA TECNICA/ TECHNICAL DATA SHEET

99.0268 METALIZED VELCRO – LOOP

➤ **Description:**

- Woven polyamide loop impregnated with silver
- For RMI / EMI applications and applications requiring electrical conductivity


➤ **Availability:**

- Widths: 5/8" (16mm), 1" (25mm) and 2" (50mm),
- Colors: brown silver
- Packaging: 50 yard rolls
 - 5/8" and 1": 500 yards per box
 - 2": 250 yards per box

➤ **Methods of attachment:**

- Sewing, stapling, gluing.

Performance characteristics: in combination with 99.0267 metalized velcro hook

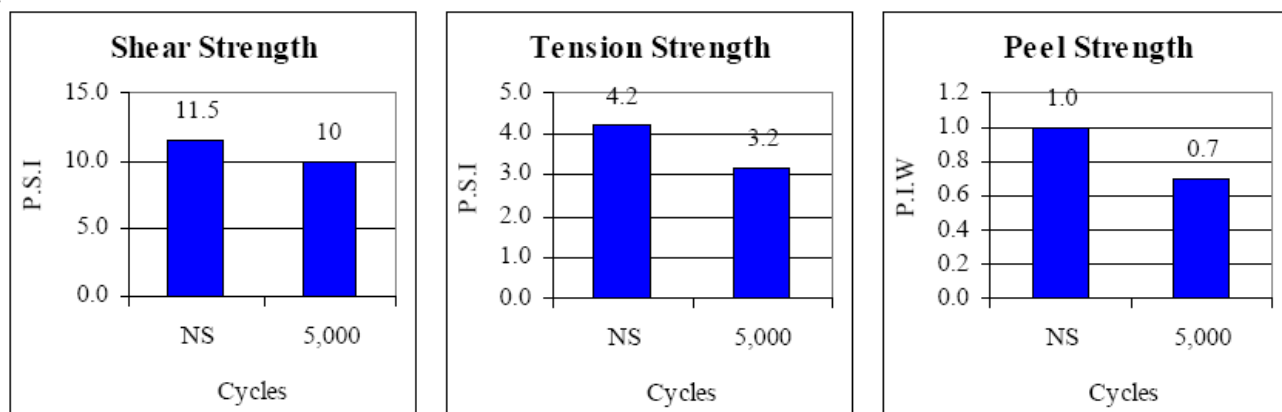

Tests performed at 73°F (±3°F) and 50% (±5%) relative humidity. Data average of multiple tests.

➤ **Physical Properties**

- Woven polyamide tape with napped loops
- Weight: 321g / sq. yd. (385g / sq. m.)
- Height: 100 mils (2.5 mm).
- Width tolerance: ±1/16" (1.6 mm),
- Selvedge width: 3/32" (2.38 mm)
- Reactions to liquids:
 - Maximum shrinkage in boiling water: less than 2%.
 - Maximum humidity absorption: 6.25
- Effects of temperature:
 - Resists heat up to: 280°F (138°C)

Resistivity: less than 2 Ohms per square inch

- **thickness when mated with 99.0267 hook: 1/8" (3.2mm)**