



TG-A38KX

High Performance Thermal Pad

REACH Compliant

RoHS Compliant

UL Compliant

Features


- Great thermal conductivity
- Difficult to be deformed
- Easy to assemble
- Double sided inherent tack

Application:


Best for low and medium power applications

Electronic components - 5G, Aerospace, AI, AIoT, AR/VR/MR/XR, Automotive, Consumer Devices, Datacom, Electric Vehicle, Electronic Products, Energy Storage, Industrial, Lighting Equipment, Medical, Military, Netcom, Panel, Power Electronics, Robot, Servers, Smart Home, Telecom, etc.

Properties

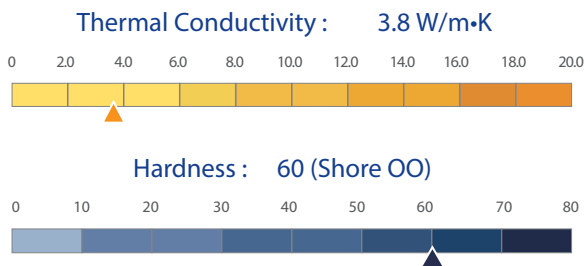

Contact Pressure, Thermal Impedance, and Deflection

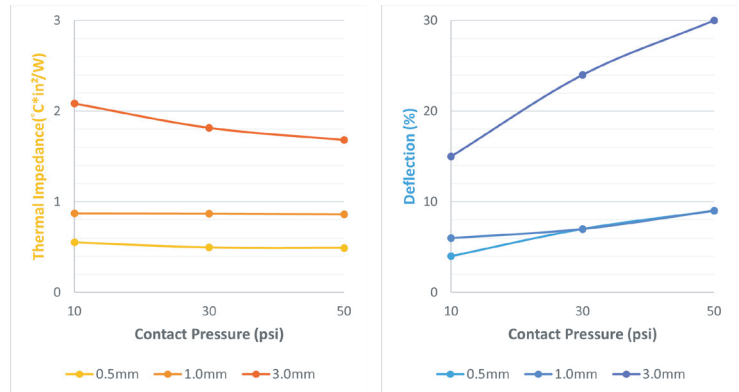

Properties	Unit	TG-A38KX	Tolerance	Test Method
Thermal Conductivity	W/m·K	3.8	± 10%	ASTM D5470 Modified
Thickness	mm	0.3~10.0	-	ASTM D374
	inch	0.012~0.394	-	ASTM D374
Color	-	Blue	-	Colorimeter CIE 1976
Reinforcement Carrier	-	-	-	-
Flame Rating	-	V-0	-	UL 94
Dielectric Breakdown Voltage	KV/mm	≥10	-	ASTM D149
Weight Loss	%	<1	-	ASTM E595 Modified
Density	g/cm ³	3.1	± 5%	ASTM D792
Operating Temperature	° C	-40~+200	-	-
Volume Resistivity	Ohm-m	3× 10 ¹²	-	ASTM D257
Elongation	%	110	-	ASTM D412
Standard Format	-	Sheet	-	-
Hardness	Shore OO	60	± 8	ASTM D2240

For thicknesses less than 1.0mm, hardness will be adjusted to 50-75 Shore OO to facilitate effective removal of liner during production
 Different tolerances according to the selected thickness
 Die-cut for different shapes