

BB02-DE

CUSTOMER PRODUCT SPECIFICATION SHEET

RoHS
Compliant



BB02-DE :- 1.27mm x 2.54mm (0.05" x 0.1") PIN HEADER, DUAL ROW, RIGHT ANGLE, THROUGH HOLE, 06 TO 80 CONTACTS

SPECIFICATIONS


CURRENT RATING	1 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	AC 300 V
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	BRASS
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0
	STANDARD : LCP + 30% G/F
PLATING	GOLD, TIN OR SELECTIVE OVER 30~50U" NICKEL
SOLDERABILITY	IR REFLOW: 280°C FOR 10 SEC
	WAVE: 250°C FOR 5-10 SEC
	MANUAL SOLDER: 380°C FOR 3-5 SEC

PACKED IN TRAY. 

MATES WITH :- BB02-EA
BB02-EB
BB02-EC

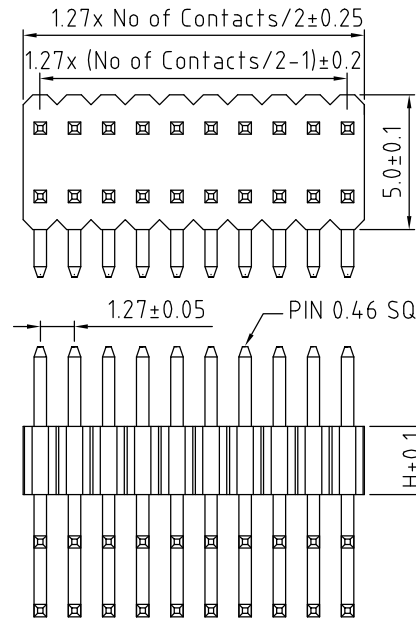


HOW TO ORDER

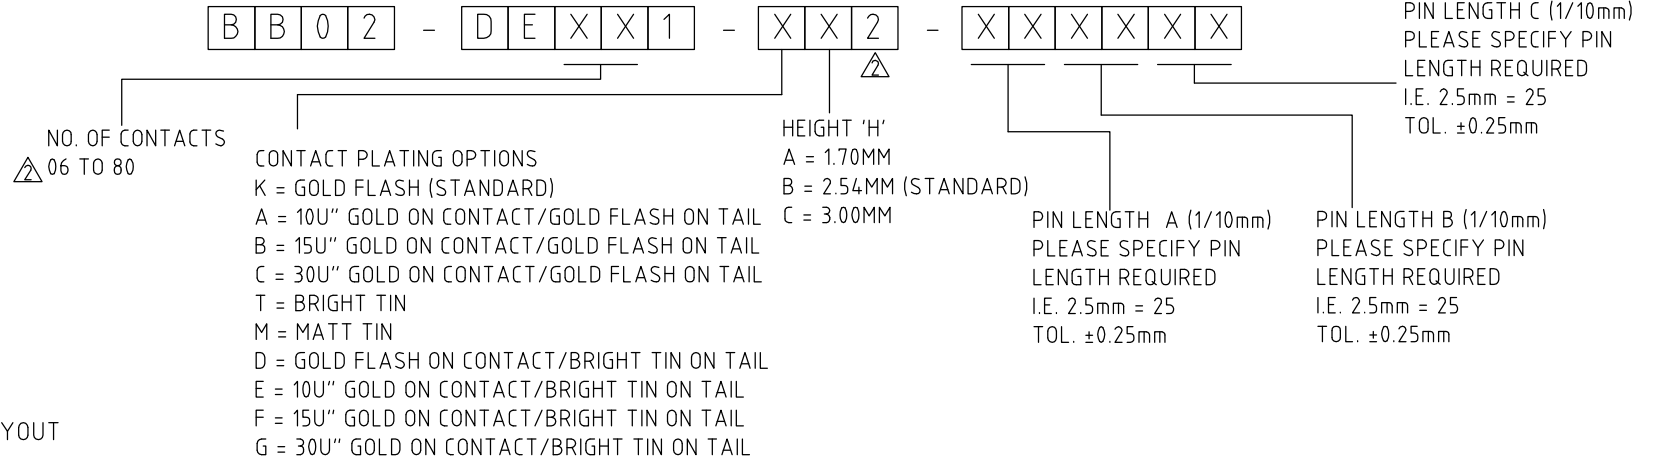


RECOMMENDED PC BOARD HOLE LAYOUT
(TOLERANCE: ±0.05)

REV.	DATE & DRN
10	25/06/03 - N/R RELEASE
11	12/02/05 - NYW DRAWING MODIFICATION
12	19/09/05 - NYW AMEND PIN DIAMETER AND NO OF CONTACTS.
13	27/07/06 - NYW AMEND PLATING AND DRAWING MODIFICATION
14	27/05/08 - CHC PLATING MODIFICATION
15	29/12/08 - CHC DRAWING MODIFICATION
16	20/05/11 - NYW CHANGE INSULATOR TO LCP.

Scale: 5:1	THIRD ANGLE	Unstated Tolerances: X ± 0.30 X ± 0.25 .XX ± 0.15 .XXX ± 0.10	Material SEE NOTE
Drawn: CHC			
App'd: XXXX	Title PIN HEADER	NOT TO SCALE	
Date: 20 MAY '11	Revision: 1.6	UNIT: mm	



THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: BB02-DE
BB02-DE
Drawing Number:
Sheet 1 of 1
Drawing  E and O E