
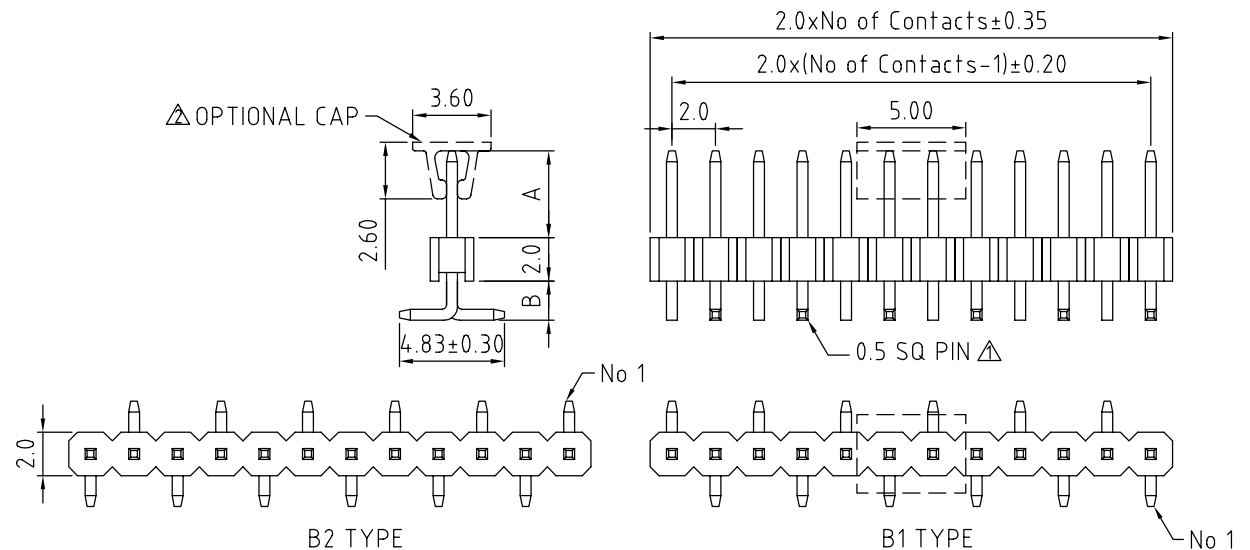


BB02-FL :- 2.00mm (0.079") CENTRE SMD PIN HEADER, SINGLE ROW - 2 - 40 CONTACTS, SQUARE PIN


SPECIFICATIONS

CURRENT RATING	2 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	AC 500 V
CONTACT RESISTANCE	20m OHMS MAX.
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	BRASS
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0 STANDARD NYLON 6T
PLATING	GOLD, TIN, OR SELECTIVE OVER 30~50U" NICKEL
SOLDERABILITY	IR REFLOW: 260°C FOR 10 SEC MANUAL SOLDER: 350°C FOR 3-5 SEC

MATES WITH :- BB02-GD BB02-RW
BB02-GS
BB02-RK
BB02-RS

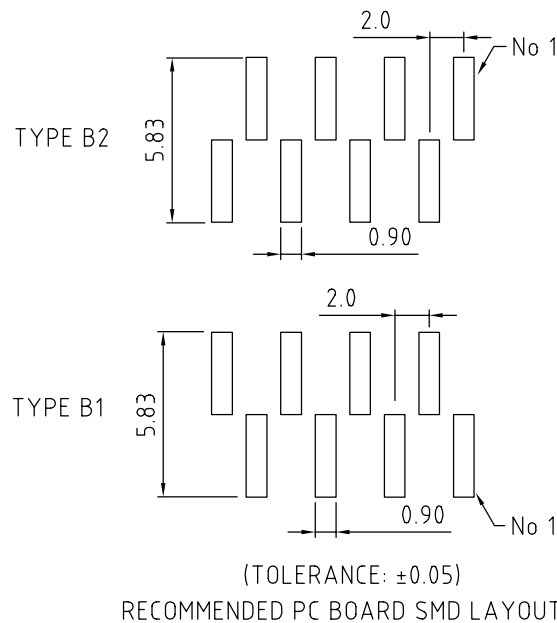

HOW TO ORDER



NO. OF CONTACTS
02 TO 40

CONTACT PLATING OPTIONS

1 = B1 TYPE
2 = B2 TYPE

PACKAGING OPTIONS

2 - LOOSE IN BO
3 - TUBE

5 - TUBE & CAP
8 - T & R & CAP

PIN LENGTH A (1/10mm)

PLEASE SPECIFY PIN
LENGTH REQUIRED
I.E. 2.5mm = 25
STANDARD = 58
TOL: $\pm 0.2\text{MM}$

PIN LENGTH B (1/10mm)

PLEASE SPECIFY PIN
LENGTH REQUIRED
I.E. 2.5mm = 25
STANDARD = 18
MINIMUM=06 
TOL: ±0.2MM

REV.	DATE	DATE & DRN
06/04/03-NYR	NEW	
10/11/04 - NYR		
11/01/04 - NYR		
12/01/04 - NYR		
13/01/04 - NYR		
14/01/04 - NYR		
15/01/04 - NYR		
16/01/04 - NYR		
17/01/04 - NYR		
18/01/04 - NYR		
19/01/04 - NYR		
20/01/04 - NYR		
21/01/04 - NYR		
22/01/04 - NYR		
23/01/04 - NYR		
24/01/04 - NYR		
25/01/04 - NYR		
26/01/04 - NYR		
27/01/04 - NYR		
28/01/04 - NYR		
29/01/04 - NYR		
30/01/04 - NYR		
31/01/04 - NYR		
32/01/04 - NYR		
33/01/04 - NYR		
34/01/04 - NYR		
35/01/04 - NYR		
36/01/04 - NYR		
37/01/04 - NYR		
38/01/04 - NYR		
39/01/04 - NYR		
40/01/04 - NYR		
41/01/04 - NYR		
42/01/04 - NYR		
43/01/04 - NYR		
44/01/04 - NYR		
45/01/04 - NYR		
46/01/04 - NYR		
47/01/04 - NYR		
48/01/04 - NYR		
49/01/04 - NYR		
50/01/04 - NYR		
51/01/04 - NYR		
52/01/04 - NYR		
53/01/04 - NYR		
54/01/04 - NYR		
55/01/04 - NYR		
56/01/04 - NYR		
57/01/04 - NYR		
58/01/04 - NYR		
59/01/04 - NYR		
60/01/04 - NYR		
61/01/04 - NYR		
62/01/04 - NYR		
63/01/04 - NYR		
64/01/04 - NYR		
65/01/04 - NYR		
66/01/04 - NYR		
67/01/04 - NYR		
68/01/04 - NYR		
69/01/04 - NYR		
70/01/04 - NYR		
71/01/04 - NYR		
72/01/04 - NYR		
73/01/04 - NYR		
74/01/04 - NYR		
75/01/04 - NYR		
76/01/04 - NYR		
77/01/04 - NYR		
78/01/04 - NYR		
79/01/04 - NYR		
80/01/04 - NYR		
81/01/04 - NYR		
82/01/04 - NYR		
83/01/04 - NYR		
84/01/04 - NYR		
85/01/04 - NYR		
86/01/04 - NYR		
87/01/04 - NYR		
88/01/04 - NYR		
89/01/04 - NYR		
90/01/04 - NYR		
91/01/04 - NYR		
92/01/04 - NYR		
93/01/04 - NYR		
94/01/04 - NYR		
95/01/04 - NYR		
96/01/04 - NYR		
97/01/04 - NYR		
98/01/04 - NYR		
99/01/04 - NYR		
100/01/04 - NYR		

Scale: 4:1		Unstated Tolerances: X ± 0.30 X ± 0.25 XX ± 0.15 XXX ± 0.10	Material
Drawn: CHC			SEE NOTE
App'd: XXXX	Title PIN HEADER		NOT TO SCALE
Date: 20 JAN '09	Revision: 1.6		Unit: mm

 Infratron www.infratron.de	Type: BB02-FL BB02-FL	
	Drawing Number: Sheet 1 of 1	
© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE REPRODUCED, COPIED, OR DISCLOSED WITHOUT WRITTEN CONSENT	Drawing ©	E and O E