


BB02-GY-A :- 2.00mm x 2.00mm (0.079" x 0.079") SOCKET, DUAL ROW, RIGHT ANGLE, SMT TYPE, 04 TO 50 CONTACTS, PROFILE: 4.0MM

SPECIFICATIONS :

CURRENT RATING	2 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	AC 500 V
CONTACT RESISTANCE	20m OHMS MAX.
OPERATING TEMPERATURE	-40 C TO 105 C
CONTACT MATERIAL	PHOSPHOR BRONZE
INSULATOR MATERIAL	THERMO PLASTIC, UL 94V-0 STANDARD NYLON 6T
PLATING	GOLD OR TIN OVER 30~50U NICKEL
SOLDERABILITY	IR REFLOW: 260 C FOR 10 SEC MANUAL SOLDER: 350 C FOR 3-5 SEC


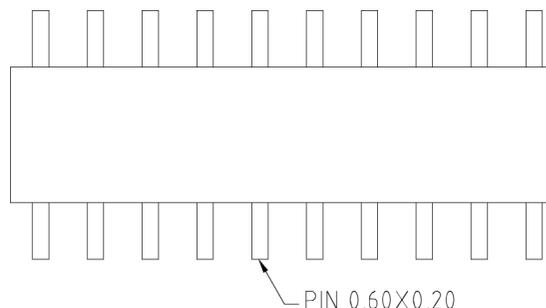


NOTES:

- RECOMMENDED INSERTION DEPTH OF MATING PIN: MIN. 2.8MM-MAX. 3.5MM.
- PARTS WITH SMALL NUMBER OF CONTACTS MIGHT BE PACKED IN BOX INSTEAD OF IN TUBE.


MATES WITH: -

BB02-FA	BB02-FR	BB02-RH
BB02-FD	BB02-FT	BB02-RN
BB02-FE	BB02-FU	
BB02-FG	BB02-RH	

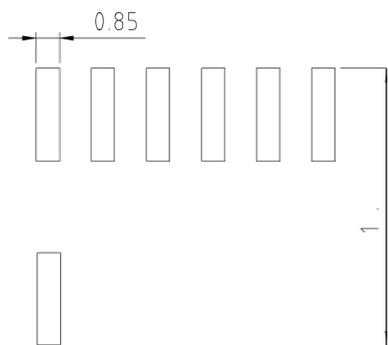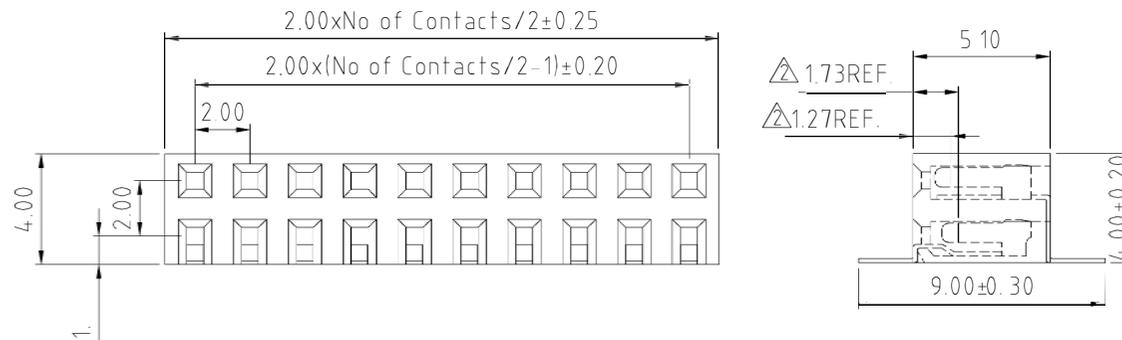

RECOMMENDED PC BOARD HOLE LAYOUT
(TOLERANCE: ±0.05)

HOW TO ORDER

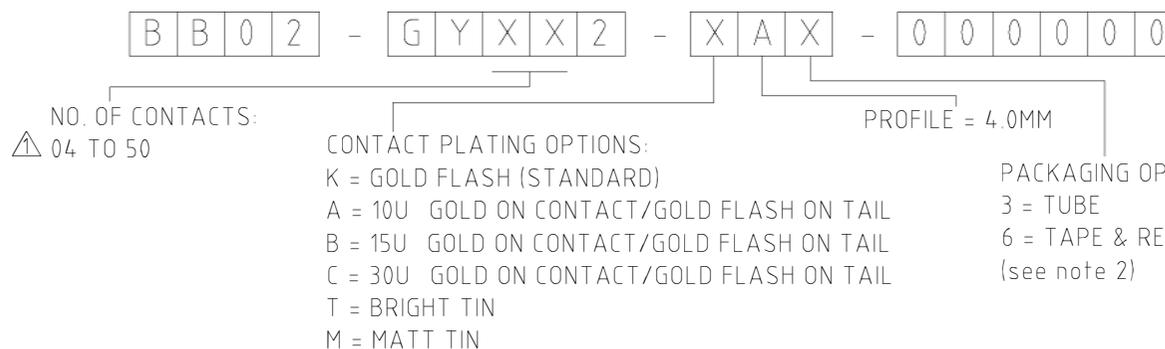

REV.	DATE & DRW
10	24/03/06 - NYW RELEASE
11	21/07/06 - NYW
12	02/07/07 - NYW
13	03/06/08 - CHC
14	05/07/08 - CHC
15	30/07/03 - NYW
16	22/07/21 - NYW

Scale:	5:1
Drawn:	CHC
App d:	XXXX
Date:	22 JUL 21

THIRD ANGLE	Unstated tolerances: ± .3 XX ± .25 ± .15 ± .1	Material SEE NOTE
Title	SOCKET	NOT TO SCALE
Revision:	1.6	Unit:

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type:	BB02-GY
Drawing Number:	BB02 GY A
Sheet	1 of 1
Drawing	© E and OE