

SPECIFICATIONS :


CURRENT RATING	2 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
CONTACT RESISTANCE	20 m OHMS MAX.
DIELECTRIC WITHSTANDING	AC 500 V
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	PHOSPHOR BRONZE
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0
	STANDARD: NYLON-6T

PLATING GOLD, TIN, OR SELECTIVE OVER 30-50U" NICKEL


SOLDERABILITY: IR REFLOW: 260°C FOR 10 SEC
MANUAL SOLDER: 350°C FOR 3-5 SEC

MATES WITH: - BB02-GH BB02-RJ
BB02-GP BB02-RL
BB02-GQ BB02-RP (perfect mate)

NOTES:
1. MATING HEIGHT = C + 1.6 + SOCKET HEIGHT.

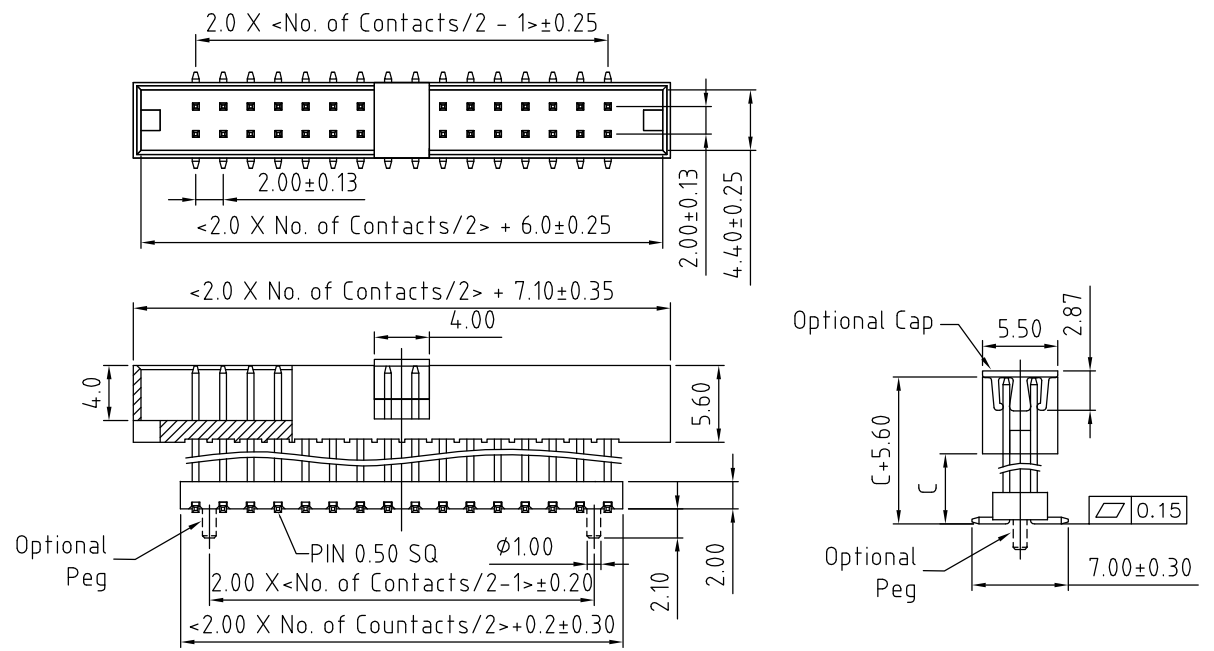

HOW TO ORDER



NO. OF CONTACTS:
08 TO 50

CONTACT PLATING OPTIONS:
K = GOLD FLASH (STANDARD)
A = 10U" GOLD ON CONTACT/GOLD FLASH ON TAIL
B = 15U" GOLD ON CONTACT/GOLD FLASH ON TAIL
C = 30U" GOLD ON CONTACT/GOLD FLASH ON TAIL
T = BRIGHT TIN
M = MATT TIN
D = GOLD FLASH ON CONTACT/BRIGHT TIN ON TAIL
E = 10U" GOLD ON CONTACT/BRIGHT TIN ON TAIL
F = 15U" GOLD ON CONTACT/BRIGHT TIN ON TAIL
G = 30U" GOLD ON CONTACT/BRIGHT TIN ON TAIL

PACKAGING OPTIONS:
3 = TUBE (STANDARD)
5 = TUBE + CAP
6 = TAPE & REEL
8 = TAPE & REEL + CAP

PIN LENGTH C (1/10mm)
PLEASE SPECIFY PIN
LENGTH REQUIRED
I.E 5,0mm = 050
MINIMUM = 025
MAXIMUM = 200
TOL. ±0.25mm

LOCATING PEG OPTIONS:
A = WITH PEGS
B = WITHOUT PEGS

